# cream production line

Model: CR LINE





The line for gels, creams, masks and another viscous materials production. The line consists of a vacuum mixer with a hopper and dispenser mounted on one frame - it is a convenient, versatile device



### cream production line

### Model: CR LINE



These machines are for example suitable for packaging cans oil. However, other food or chemical liquids may also be present to be filled into different types of packaging.



The structure on the wheels allows the machine to move easily and can be easily adjusted your needs.



# The technological line for cream production consists of:

- Processing vacuum mixer PVM100 with low speed rotary pump Processing vacuum mixer is made of high quality food grade stainless steel AISI 316, with scraper agitator NORMIT SCRAPED STIRRER which is equipped with Teflon scrapers effectively blurring the product from the wall of the container which allows maximum use of the product as well as more efficient cleaning of equipment. Cleaning is provided by cipballs. Part of the mixer stainless el. control box with touch panel and display window. Low speed rotary pump AISI 316. Vacuum is created by vacuum pump.
- Control unit PVM100
- Hopper for dosing liquid mixtures With manual valve

## cream production line

#### Model: CR LINE

**Piston filler** - The speed and performance can be set. Filling accuracy is very high.

The possibility of using the filling into the cup. It is made of stainless steel, so that we achieve the highest quality and hygiene. - It works on the principle of the piston. Filling range ml 10-75 no compressor,

product

#### CIP - 2 x 50l

CIP station CIP unit 2×50 liters with neutralizing vessel Width 1 150 mm Height 1 460 mm Depth 480 mm

Container with NAOH 50L, Container with H2SO4 50L Boiler12 l

Heatingelement 3 500 W Neutralizationvessel

23 | Distributionpiping DN


25 ArmaturesDN 25, 1.4301 Pump, type Ebara CDX 70/7, 95 l/min,


230V/50Hz Electricswitchboard Main electricalconnection 3\*400V/50Hz

16A Circuitbreaker230V 16A Digitalregulator DixelXR 10 D

- Material AISI 316L + sensor of indication of Contactorofheating 230V 16A Motor starter 230V ProbeNTC 6 mm
  - Cable5x 1.5 5m Inlet(suctionpart) GG DN 25 Outlet(deliverypart) GG
  - DN 2

Model:	CR LINE
C height	2079,33
B width	850
A length	1625,35

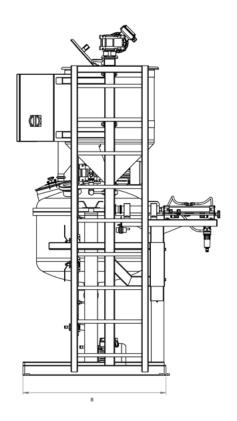

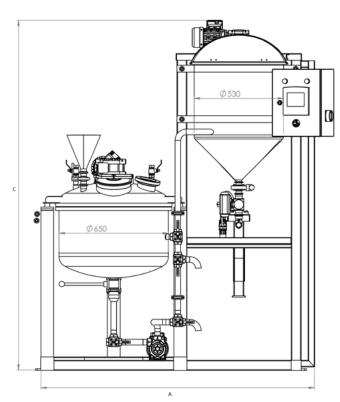

#### NORMIT FOOD, s. r. o.

Pezinská cesta 5104 901 01 Malacky, SLOVAKIA

Skype: manager.normit Telephone number: +421 902 400 321

E-mail: sales@normit.com

Web: www.normit.com